(54) Title: A METHOD FOR ANALYSIS OF BIOLOGICAL SYSTEMS
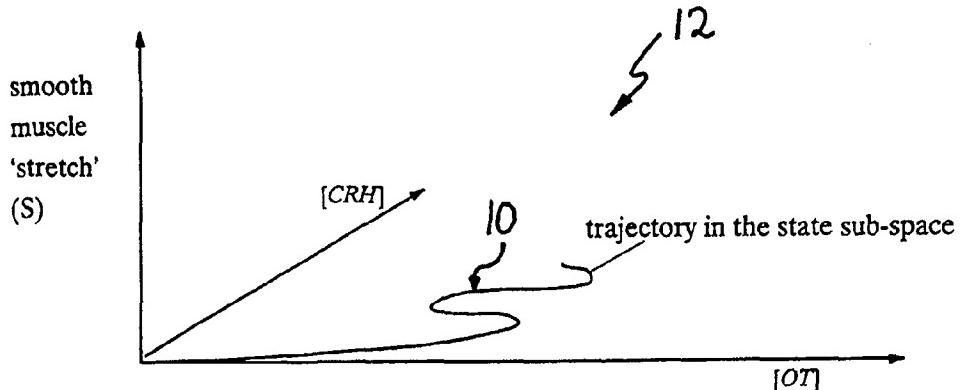
(57) Abstract

A method of analysing an evolution of a biological system comprising the steps of determining a series of variables upon which a state of the biological system depends, mapping the variables to an n–dimensional space, and wherein the evolution of the biological system is monitored utilising a trajectory formed from sets of the variables which define the states of the biological system at different times, thereby using time as a parameter in the n–dimensional space in a manner such that every point on the trajectory corresponds to at least one value of time.

- 1 -

A METHOD FOR ANALYSIS OF BIOLOGICAL SYSTEMS

Field of the Invention

The present invention relates to the organisation and
interpretation of data relating to biological systems. The
5   invention will be described hereinafter in the context of
medical research/clinical management of patients, i.e.
using medical terminology, but it will be understood that
the present invention does have broader applications to
biological systems in general.

10   Background of the Invention

In medical research and monitoring of patient
behaviour it is currently the usual approach to "pool"
data, i.e. to base an analysis on trends derived by
averaging particular data obtained from a large number of
15   patients in a suitable way. It is further common to limit
an evaluation of a patient's behaviour to one variable at a
time, i.e. the development of a particular variable is
followed over time and, for example, charts illustrating
the development are used to assist the practitioner in his
20   assessment of the patient behaviour. This has several
disadvantages.

For example, the reliance upon averaged data in
evaluating the patient behaviour somewhat limits the
spectrum of the assessment made as extreme values on
25   opposite sides of the average are effectively cancelled out
of consideration in the assessment. Another disadvantage
is that this "one variable at a time" approach makes it
more difficult for the practitioner to remain alert to
various other variables which could form a complex
30   interrelationship with the particular variable when
evaluating the patient behaviour. This is not to say that
practitioners in general are not alert to this problem, but
the likelihood of not taking into consideration all
necessary variables is increased.

35   In current medical practice one variable at a time

(e.g. temperature) is plotted against time. Time appears
as an independent variable typically along the X-axis and
e.g. temperature along the Y-axis. Many such separate two-
dimensional graphs are used to plot various variables such
5   as blood pressure against time, urinary volume against
time, heart rate against time etc., each variable being
depicted on a separate graph. Up to now, the use of time
as the independent variable plotted along one axis of the
graph somewhat dictates the preferred use of a multiplicity
10 of two-dimensional graphs when managing medical data.

In contrast, it is known that physicists employ a set
of variables to describe the behaviour of a particular
system in a three-dimensional space. A well-known example
that is a paradigm for the scientific method is provided by
15 the behaviour of an ideal gas. In this case the variables
are pressure, volume and temperature and together they
define a three-dimensional space. Those variables are
related by the well known "equation of state for an ideal
gas"

20                     $P\ V = n\ R\ T.$

In this equation n is the number of moles of gas
present in the system and R is the universal gas constant.
This equation may be represented as a surface in the three-
dimensional space and represents each "allowed" state of an
25 ideal gas in those three dimensions.

Summary of the Invention

At least preferred embodiments of the present
invention can enhance the management and interpretation of
data relating to a biological system to thereby improve
30 e.g. the assessment capabilities of a non-specialist
doctor.

In accordance with a first aspect of the present
invention there is provided a method of analysing an
evolution of a biological system comprising the steps of
35 determining a series of variables upon which a state of the

- 3 -

biological system depends, mapping the variables to an n-dimensional space, wherein the evolution of the biological system is monitored utilising a trajectory formed from sets of the variables which define the states of the biological system at different times, thereby using time as a parameter in the n-dimensional space in a manner such that every point on the trajectory corresponds to at least one value of time.

In that way, time is used as a "hidden" variable to analyse the evolution of the biological system, which can facilitate an improved method of analysing the evolution of the biological system in which the interrelationship between the variables upon which the state of the biological system depends can become more apparent.

In one embodiment, the method further comprises the step of evaluating the evolution of the biological system utilising sets of predetermined values of the variables to formulate an n-dimensional surface representing a predetermined state of the biological system within the n-dimensional space.

Preferably, n is an integer greater than 2.

In one embodiment, the step of evaluating the evolution of the biological system comprises predicting a progression of the trajectory.

Preferably, the prediction of the progression of the trajectory is based on the previous development of the trajectory within the n-dimensional space.

In another embodiment, the prediction of the progression of the trajectory is based on other trajectories determined in the n-dimensional space.

In accordance with a second aspect of the present invention there is provided a method of representing a predetermined state of a biological system comprising the steps of determining a series of variables upon which the predetermined state of the biological system depends,

- 4 -

mapping the variables to an n-dimensional space and
utilising sets of predetermined values of the variables to
formulate an n-dimensional surface describing the
predetermined state within the n-dimensional space.

5   In accordance with a third aspect of the present
invention there is provided a computer arranged to analyse
an evolution of a biological system based on a series of
variables upon which a state of the biological system
depends, the computer being arranged to map the variables
10   to an n-dimensional space, and to monitor the evolution of
the biological system based on a trajectory formed from
sets of the variables which define the states of the
biological system at different times.

        In accordance with a fourth aspect of the present
15   invention there is provided a computer arranged to
represent a predetermined state of a biological system
based on a series of variables upon which the predetermined
state of the biological system depends, the computer being
arranged to map the variables to an n-dimensional space and
20   to formulate an n-dimensional surface describing the
predetermined state within the n-dimensional space, based
on sets of predetermined values of the variables.

        In accordance with a fifth aspect of the present
invention there is provided a computer readable storage
25   medium comprising instructions to control a computer to
analyse an evolution of a biological system based on series
of variables upon which a state of the biological system
depends, the instructions comprising instruction to control
the computer to map the variables to an n-dimensional
30   space; and monitor the evolution of the biological system
based on a trajectory formed from sets of the variables
which define the states of the biological system at
different times.

        In accordance with a sixth aspect of the present
35   invention there is provided a computer readable storage

medium comprising instructions to control a computer to represent a predetermined state of a biological system based on a series of variables upon which the predetermined state of the biological system depends, the instructions comprising instructions to control the computer to map the variables to an n-dimensional space; and formulate an n-dimensional surface describing the predetermined state within the n-dimensional space, based on sets of predetermined values of the variables.

The present invention may be applicable, but is not restricted to use in a clinical context, in medical research and in medical training. The medical training can comprise both medical training of persons in the medical profession and training/developing a better patient's understanding.

Embodiments of the invention may play an important role in assisting patients to understand, firstly, what is wrong. For example, they may be moving along a trajectory that is likely to lead to a disease state, such as cardiovascular disease. Secondly, they may assist patients to then appreciate what has to be done to ensure a healthy state is maintained or regained. This could be a valuable tool facilitating doctor-patient relationships and improving patient compliance with the proposed treatment regime.

Embodiments of the invention may be employed as valuable educative tool when training health professionals. The concept of a state-space, current location in the state-space and proximity to various limit-states is a valuable method for representing normality and disease and this may facilitate the education of medical professionals. The conceptual framework of the invention can be presented graphically. Details of how this can be done can be found in the description of preferred embodiments of the invention. All disease states may be viewed as a movement

toward some particular limit-state surface in some state-
space. The signs and symptoms of disease may be viewed as
particular locations in a state-space in relation to
suitably chosen limit-state surfaces.

5   An important part of the medical interview is the
patient history. In the context of the invention as
described here, this history may be interpreted as the
patient's perception of their proximity to various
limit-state surfaces. This information may be incorporated
10   into embodiments of the invention in a semi-quantitative
way (ie. by employing a magnitude on some appropriate scale
and limit-state surfaces at appropriate locations in the
state-space).

          With the assistance of a suitable computer program,
15   the systematic evaluation of various treatment scenarios
could be examined in a clinical environment by the treating
physician but may also be used in controlled learning
environment using the model, in much the same way as pilots
are trained using a flight simulator by an instructor. It
20   will be understood by a person skilled in the art that
known techniques such as the use of neural networks may be
utilised in improving the reliability of simulations.

          The invention is also potentially useful in assessing
the cost of various treatment alternatives if used in
25   conjunction with a suitable cost database. The model may be
a very valuable tool for the allocation of scarce resources
by medical management.

          The mathematical model used in embodiments of the
invention may be 'customised' by experts in the field,
30   reflecting their particular understanding of a subject.

          In some cases, previous medical conditions may have
lead to realisation of a specific condition (eg. a previous
pregnancy, or previous hospitalisation for asthma
treatment). This patient specific information may also be
35   incorporated in the model to improve the predictive

capability of the model for that particular patient. Hence,
a valuable component of a patients' medical record may be
an interpretation of their medical history in terms of the
mathematical model described here.

5   Brief Description of the Drawings

The invention may be more fully understood from the
description of preferred forms given below with reference
to the accompanying drawings, by way of example only.

In the drawings,

10   Figure 1 illustrates a state subspace with a
trajectory of a patient behaviour in accordance with an
embodiment of the present invention.

Figure 2 illustrates another state subspace with
trajectory of a patient behaviour in that state subspace.

15   Figure 3 illustrates the state subspace of Figure 1
with a trial limit-state function describing the occurrence
of an event in that state subspace.

Figure 4 illustrates the state subspace of Figure 3
with the trajectory of the patient behaviour of Figure 1.

20   Figure 5 illustrates trajectories of patient
behaviours intersecting multiple event function surfaces in
another state subspace.

Figure 6 is a diagram illustrating dependent and
independent variables for use in a method in accordance

25   with an embodiment of the present invention.

Description of a Preferred Embodiment

The embodiments of the invention will be described by
way of reference to a number of initial examples. However,
the scope of the present invention is not limited to these

30   examples. To further illustrate the broader application of
the invention, in the following a particular terminology is
introduced in which terms are defined in a conceptional
sense and then particular examples are given in which the
conceptional terms are correlated with specific systems.

35   The conceptional basis for the invention is the

analysis of a biological system, for example the physiological states in humans, in a multi-dimensional state-space. The dimensions of the state space are correlated with parameters/variables which influence the
5   biological system, i.e. which influence the state of the biological system in respect of the state-space. The behaviour of the biological system can thus be described as the evolution of the state of the system within the state-space over time, i.e. a trajectory of the biological system
10 is monitored and from it the current state of the system can be known. Importantly, provided the state space is chosen correctly, certain states of the biological system within the state-space will be attributable to certain biological events, i.e. the biological state of the system
15 has reached a particular limit-state. Particular examples for limit-states are given below. Generally speaking a limit state is the realisation of a biologically or medically defined state of the system, both normal and abnormal states. As various combinations of different
20 parameters can lead to the realisation of a particular limit-state, the limit-state can be described as a function within the state-space. The relative positioning of the trajectory of a biological system and a limit-state surface within the state-space can form the basis for the
25 development of a systematic method for both differential diagnosis and for patient management. The use of the method for differential diagnosis may form the basis of information structuring in an `expert system' for the purpose of medical differential diagnosis.
30   The state-space variables may be normalised (non-dimensionalised) by various methods, each method of normalisation resulting in a different depiction of the trajectories and limit surfaces in the normalised state-space.
35   One normalisation method can reduce a trajectory to a

point in the normalised state-space. If the trajectory that is reduced to a point in the normalised state-space is the mean (or median or mode) trajectory, then trajectories in the normalised state-space will represent departures from this mean (or median or mode) trajectory.

In the following, examples of preferred embodiments of the invention will be described with reference to the physiological states in humans.

Example I: ANALYSIS OF PHYSIOLOGY OF PREGNANCY

A first example relates to the analysis of pregnancy in women. Pregnancy is distinguished by one very obvious event, giving birth. It is practice to regularly monitor women over the course of the pregnancy, thereby facilitating the monitoring of several parameters during that period.

A careful consideration leads to the initial proposal of the following 'simple' state-space for the assessment of pregnancy. The state-space variables chosen for plotting the trajectories are corticotrophin-releasing-hormone concentration (CRH), oxytocin concentration (OT), progesterone concentration (P), oestrodiol concentration (E), cortisol concentration (C), cervical stiffness (CS) and stretch of the smooth muscle fibres within the uterus (S). S may be a dependent variable from independent variables which could include such quantities as volume of the amniotic fluid and fetal mass. CRH may be a dependent variable from independent variables which could include such quantities as placental mass, maternal blood volume and concentration of maternal CRH binding protein. Other independent variables may also be specified in turn for each of the remaining five state variables.

There may be other known state-variables (eg. relaxin, prostaglandins) or as yet unknown state-variables of importance. It is further observed that failure of the model to achieve the desired reliability could suggest the

- 10 -

presence of additional, as yet unknown factors.

The limit-states that may be of interest for the analysis of pregnancy include 'uterine contractions leading to birth', 'cervical competence' and 'fetal lung maturation'. Only 'uterine contractions leading to birth' will be pursued here as an example. All the state-variables except CS will be employed as state-variables for the analysis of this limit-state.

There are six state variables employed here in the consideration of the 'uterine contractions leading to birth' limit state analysis. Those may be grouped into two state-subspaces, with each state-subspace involving three state-variables (see Figures 1 and 2).

A first trajectory 10 in a first state-subspace 12 is sketched in Figure 1 and a second trajectory 14 in state-subspace 16 is sketched in Figure 2. While the grouping of state-variables may be arbitrary, there may be reasons for choosing one grouping of variables over another. For example, state-variables may be grouped according to clinical importance.

It is seen that the first trajectory 10 in the first state-subspace 12 (Figure 1) oscillates throughout pregnancy due to diurnal fluctuations in the concentration of oxytocin. There may be normal and or abnormal (ie. pathologic) trajectories in this state-subspace. Normal and abnormal behaviours along the CRH axis leading to pre-term, term and post-term parturition have already been identified by the research investigations of Mark McLean, Andrew Bisets, Joanne Davies, Russel Woods, Philip Lowry and Roger Smith (May , 1995), 'A placental clock controlling the length of human pregnancy', Nature Medicine, Vol. 1 No. 5 p. 460-463)

It is seen that the second trajectory 14 in Figure 2 also oscillates late in pregnancy due to diurnal fluctuations in the concentration of E and P. (It is noted

- 11 -

here that the E/P ratio may be a more appropriate
state-subspace variable, rather than E and P separately).
Once again, there may be normal and/or abnormal (ie.
pathologic) trajectories in this state-subspace.

5   The limit-state surface (not shown) in both
state-subspaces may evolve (change position) over time.
This is due to the fact that the limit-state surface is
dependent on variables which are themselves time dependent.
A third limit-state surface 20 in one state-subspace 21

10   (CRH, OT and S), at one particular time, is shown in Figure
3.

        It is well known that the processes leading to
pregnancy contain redundancies. By this it is meant that
some state-variables may not be essential for a normal

15   birth. In other words, a redundant state-variable may be
important when present, yet non-essential to a normal
birth. It is noted that the described redundancy of
state-variables observed during pregnancy is made
immediately visually clear by the ellipsoidal shaped

20   limit-state surface proposed here. For example, if CRH is
absent (or present in abnormal very low concentrations),
then the state-subspace in Figure 3 is reduced to two
dimensions, and a women's trajectory in the state-subspace
will be confined to a 'plane' in the state-subspace. It is

25   immediately visually apparent that the trajectory confined
to this plane can still intersect the limit-state surface.
This intersection of trajectory and limit-state surface
indicates that progression to birth is still possible.

        To better visually comprehend the trajectories of

30   pregnant women in the state-space, it may be advantageous
to have the two state-subspaces depicted simultaneously on
a computer screen. Time could also be indicated along each
trajectory by 'tick' marks. Speed along the trajectory may
be indicated by a line of varying thickness, or colour. It

35   is noted in passing that the time lapsed since conception

can be accurately measured using ultra-sonic techniques.

It is probable that the limit-state surface in each
state-subspace expands (moves away from the origin) early
in pregnancy (due to it being dependent on state
5   variables), and may contract and then oscillate later in
pregnancy, thereby precipitating parturition. The
oscillation of the trajectory and the limit-state subspace
surface is believed to be 'phase locked' (ie. the
trajectory in a state-subspace moves away from the origin
10   at the same time as the limit-state surface moves toward
the origin). This simple observation, easily visually
comprehended using the methods described here, may explain
why the initiation of births occur during the night due to
a periodical contraction of the limit-state surface during
15   night time.

Now that the limit-state surface is known to be
important, the 'shape' of the state surface in a
state-subspace may be actively 'probed' by selected
tracking of individual women throughout pregnancy. As this
20   data becomes available, it is expected that the trial limit
state surface 20 shown in Figure 3 will be modified. This
procedure will define normal and abnormal trajectories in
the state-space, as well as the shape of the limit-state
surface. This empirical approach to define the limit-state
25   surface and trajectories in the state-space may be
supplemented when possible by detailed physiological and
biochemical models. This method of investigating pregnancy
is an example of how the mathematical method described here
can be utilised in medical research.

30   The onset of uterine contractions leading to birth
occurs when the trajectory 22 in the 'state-space' 21
intersects the limit-state surface 20. This is shown in the
Figure 4. It is clearly advantageous for defining the
limit-state surface, to monitor the trajectory accurately
35   close to the time of birth, and preferably obtain a point

in the state-space at the time of birth (ie. on the
limit-state surface). However, if this is not possible, it
is believed that it may be possible to reliably extrapolate
the trajectory in the state-space to the time of birth,

5   given adequate previous knowledge of the trajectory in the
state-space and knowledge of the underlying physiological
and biochemical processes.

Example II: PREDICTIVE ANALYSIS

       The embodiment described above has been described in a

10   deterministic format. However, a statistical analysis of
the current location in a state-subspace in relation to the
limit-state surface can be easily incorporated in another
embodiment. This could be implemented in various ways, a
Monte-Carlo simulation being one of the most general method

15   applicable. This embodiment could then be employed to make
predictions of the type 'there is a 90% chance that a
pre-term delivery will occur'.

       It is noted that the effect of a proposed course of
medical intervention could be quantitatively assessed by

20   the embodiment described. For example, the likely effect of
intervention by a clinician using a CRH antagonist could be
shown in the state-space. As there may be several ways of
achieving the desired outcome (ie. realisation of the limit
state event, or moving away from the limit-state event),

25   alternative treatment methods could be assessed before they
are implemented by a clinician. The distance between the
current state and the limit-state surface, in conjunction
with probability density functions, will give a
quantitative measure of likelihood of success or otherwise

30   of the proposed intervention.

       It is noted that the distance of interest may not be
the 'shortest distance' between the current position in the
state-space and the limit-state surface, but could depend
on an individual's trajectory in the state-space. If the

35   trajectory is well-defined (ie. both direction and speed is

known, or can be estimated), it may be possible to reliably
extrapolate from the current position in the state-spate to
some future position in the state-space. If the speed along
the trajectory is known, or can be reliably estimated on
5   the basis of past experience, then the time to realise the
limit-state event could be reliably estimated. In other
words, the time of birth could be reliably predicted.

The embodiments described above could be presented as
a computer program that is employed as an aid to clinicians
10   in management of their patients. Normal and abnormal
trajectories in each state-subspace could be displayed in
different colours. This method could then be employed as a
valuable predictor of abnormal pregnancy states. Normal and
abnormal limit-state surfaces could also be displayed in
15   different shadings. Multiple limit-state surfaces could be
depicted in different colours, and highlighted by a 'light
source' strategically located in relation to the observer.
When multiple limit-state surfaces are depicted, only the
'closest' limit-state surfaces in relation to the current
20   position may be displayed, thereby assisting visual clarity
of the problem. Optimal or 'target' positions may be marked
on a limit-state surface.

The time evolution of the trajectory and limit-state
surfaces in the state-subspace could be animated to enhance
25   understanding of the dynamic nature of the system.
'Zooming' and 'rotating' the computer image to position the
viewer's vantage point at right-angles to the trajectory
may facilitate comprehension of the situation. In other
circumstances, rotating the viewer's vantage point to be at
30   right angles in the limit-state surface at the anticipated
interception point of the trajectory with the limit-state
surface may be helpful in interpreting the results of the
mathematical model (eg. viewing the marginal probability
distributions).

35   Several state-subspaces may be viewed simultaneously

on a divided computer screen. Investigation of treatment
alternatives by a clinician could be made by 'clicking' and
'dragging' the current position in a state-space to a new
position in the state-space, this new position representing
the effect of intervention. This 'virtual' intervention
could then be assessed by computing updated positions of
the limit-state surfaces in the multi-dimensional space.
Graphically, this would be seen by the analyst as a
limit-state surface 'swinging around' in the state-space.
The clinician could be alerted to any intersections of
trajectories and limit-state surfaces. The clinician could
select the level of probability of realising a limit-state,
and only those limit-states with a greater probability of
occurrence would be brought to the attention of the
clinician by a warning appearing on the screen.

It is often the case that limit-state surfaces are
smooth, continuous, differentiable functions in the state-
space. Further, it is often the case that a limit-state
surface may be a finite 'patch' in the state-subspace
(having a finite 'height' and 'length'), due to the range
of biologically achievable values for the state variables
being limited.

The state-space may have intersecting
multi-dimensional limit-state surfaces. The intersection of
limit-state surfaces is attributed to simultaneous
satisfaction of several limit-states. For simultaneous
realisation of several limit-states, the trajectory in the
state-space must intersect the limit-state surfaces at one
point see figure 5.

Processes that are sequential in time are represented
by a set of limit-state surfaces that are intersected
sequentially by the trajectory see figure 5.

Abnormalities of pregnancy can be made visually
apparent from sequential intersection of limit-state
surfaces rather than simultaneous intersection of the

limit-state surfaces. For example, if the 'cervical competence' limit-state surface is intersected before the 'uterine contractions' limit-state surface, then this indicates spontaneous abortion. On the other hand,

5   intersection of the 'uterine contractions' limit-state surface before intersection of the 'cervical competence' limit-state surface can indicate rupture of the uterus.

More complex process controls, involving multiple process in series and parallel could also be presented

10 geometrically in the state-space, this geometry being characteristic for the process. Further, as each disease has a characteristic set of clinical features, it is suggested that each disease process would have a 'characteristic geometry (or arrangement) of limit-state

15 surfaces' in the chosen state-space, as well as 'characteristic trajectories' in the state-space.

Given this, it is possible to program into the model a vast library of disease state signatures, that is, sets of trajectories and arrangements of limit-state surfaces in

20 defined state-spaces that are characteristic of particular disease states. Given suitable input, the library of disease states could be searched and the closest matches to the known trajectories of a patient being investigated displayed on a computer screen. Further, using statistical

25 methods, the possible disease states for a given set of input data could not only be identified, but arranged in order of probability, from most likely to least likely disease. This could be a valuable clinical tool for the differential diagnosis of disease states.

30   It is conceivable that the data input to the computer may be at least partially automated. For example, biochemical data could be encoded in bar codes down the side of a laboratory report, while physiological data may be input from electronic monitoring devices. In addition,

35 specific electronic systems may be built into the physical

- 17 -

structure of a hospital to facilitate the management of its patients using the method described herein.

Given that there could be a large number of limit-states for a particular disease process, it could be helpful to prioritise or group the limit-states surfaces in some way. For example, limit-state surfaces may be grouped in signs and symptoms of disease commonly employed by clinicians, while another group of limit-state surfaces may be more conveniently employed with biochemical data.

The invention may be easily adapted to include the influence of a drug on anticipated therapeutic outcomes. This influence may be reflected as a change in the shape of the limit-state surface and/or the position within the state-space. It is noted that given sufficient data, a data base of limit-state surfaces for subgroups within a population could be defined in a computer program. For example, women on a particular medication throughout their pregnancy.

In respect of other applications, the management of patients in intensive care could be an example application for the invention. Even after many years of training and practice, it is still very difficult to consider all likely implications when managing a critically ill patient. In this situation, it could be highly beneficial to 'test' a proposed intervention using the method of invention described here. It is easily imagined that the effect of administering a drug to a patient could be trialled on the computer, perhaps by the simple experiment of positioning the cursor on the current position in the state-space, 'clicking' at this position, and then 'dragging' the current position in the state-space to a new location. Even if only one or two subspaces were represented on the computer screen, the effect in 'm' state-subspaces and on 'n' limit-state surfaces could be checked very quickly by calculation. If any limit-state surfaces were found to

intersect a trajectory in a state-subspace, the doctor could be alerted, perhaps by a message on the computer screen. The relevant state-subspace could then be viewed on the screen. This procedure can represent an enormous

5 advance over simply trialling the drug in a patient as is presently the case, and perhaps realising too late that some unexpected event has occurred.

Example III: POORLY DEFINED SYSTEM BEHAVIOUR

Even when the system behaviour is very poorly defined,

10 the invention may have some benefits. The state-variables may then be identified as 'risk factors', as they are commonly known. An example is provided by cardiovascular disease. Known risk factors, such as high blood pressure, overweight, family history of heart disease, smoking and

15 high cholesterol may be taken as state variables. For this example, limit-states could be 'heart ischemia' or 'stroke'. The predictive power of the model may be poor, but this only reflects inadequate understanding of the underlying process, and indicates that additional factors

20 are of significance. To further the example of cardiovascular disease, it has recently been established that homocysteine is an important risk factor. With this additional variable comprising the state-space, it is expected that the predictive power of the model would

25 improve. It is evident from this simple example how the latest research data may be incorporated into a model in accordance with the invention, and so it can improve in its role as clinical tool as medical research advances.

Some disease states may be immediately incorporated in

30 the embodiments described here, while others will require more research data. Examples of disease states that could immediately benefit from the approach described here include endocrine diseases, asthma, AIDS and the management of patients in intensive care.

35

- 19 -

Example IV: REPRESENTATION OF MULTI-DIMENSIONAL LIMIT STATE
SURFACE

Rene Decartes represented a function in a 'cartesian
plane'. This had simple visual appeal, and by this means,

5   everyone clearly understood what was meant by the term
'function'. A function has one and only one value of the
dependent variable 'y' associated with a value of the
independent variable 'x'. This can be represented simply by
means of a 'cartesian diagram', with 'x' plotted along the

10   horizontal axis and 'y' plotted along the vertical axis.
It is not hard to generalise this result to two
independent variables and one dependent variable. In this
case, the variables 'x' and 'y' are the independent
variables in the horizontal plane, and 'z' is the dependent

15   variable in the vertical direction. In this case, the three
dimensional 'cartesian' axes suffice to represent the two
independent and one dependent variables. The outcome may be
plotted as a two dimensional 'surface', the height above
the 'xy' plane representing the magnitude of the dependent

20   variable, or outcome. A line joining equal heights above
the plane represent a 'level surface'.
Alternatively, each location in the 'xy' plane may be
associated with a number, and a line drawn joining points
in the 'xy' plane that are of equal magnitude. Such a map

25   is known as a 'contour' map, and has the advantage of
representing a three dimensional surface in only two
dimensions (ie. the 'xy' plane). A limit-state surface may
be represented by a contour on a contour map.
This is generalisable to four dimensions, the three

30   axes representing the independent variables and the
limit-state is represented as a 'level surface' in the
three dimensional state-space.
Let there be a function describing a limit-state
surface in n dimensional space, viz,

35                          $f = f (X, .. ,X_n)$

It is then possible to hold all but three of the
independent variables constant. The function is then
reduced to four dimensions. These four dimensions are, the
three cartesian axes (forming a state-subspace) and a value

5 associated with each location in the state subspace (note
that all the independent variables not in the state
subspace are held constant). Now that the dimensionality
is reduced, a level surface of function f can be
conveniently depicted on a computer screen. Changes in the

10 fourth dimension, i.e. resulting from changes in the values
of the independent variables held constant for the
representation, can be illustrated by replotting the
function f in the three-dimensional state-subspace as
altered by those changes. It is noted that more than one

15 surface representing function f could be plotted within one
graph to illustrate the dependency of the function f the
variables in the state sub-space. This dependency of the
function f on the state sub-space variables could be made
visually apparent by colour shading in state sub-space or

20 by textual features on the limit surface itself.

If there are twelve independent state variables, then
the computer screen could be 'tiled' into four quadrants,
and in each quadrant the procedure described in the
previous paragraph adopted. That is, each 3-D

25 state-subspace shown in each quadrant would represent the
limit-state surface for all but three dependent variables
held constant. If the limit-state surface involved the
variables in each subspace, then the limit-state surface
would be represented in that subspace. The trajectory of

30 the state variables could be depicted in each
state-subspace, together with the limit-state surface.
Changes of the trajectory and/or the limit-state surface in
one state-subspace could then be automatically
"transformed" onto the other state-subspaces.

35 In some circumstances, the dimensionality of the

problem may be conveniently reduced by defining a new state
variable, Y_k as a function of the state variables X_i, viz,

$$Y_k = h(X_1, \ldots, X_i, \ldots, X_1)$$

This procedure provides a means of systematically
structuring medical information (for further details see
Example V).

Using the terminology of 'vector geometry', for
complex systems, the 'basis' vectors chosen for the n-
dimensional state space may not be orthogonal, and that
appropriate groupings of the variables may improve
orthogonality of the chosen basis vectors. It is further
noted that for poorly defined systems appropriate groupings
of variables may be indicated by standard statistical
techniques eg. factorial analysis. However, orthogonality
of the basis vectors is not essential for the method
described here to be implemented, given that the system is
adequately characterised by research data.

Example V: SELECTION OF STATE-VARIABLES

A 'causation tree' 30 (see figure 6) can provide a
systematic approach for the identification and arrangement
of state-variables, thereby providing a means for
structuring the system information.

Having chosen a dependent variable that is appropriate
for the limit-state being investigated, a causation tree 30
may be constructed, showing all 'independent'
state-variables 32, 33, 34 contributing to the value of the
dependent variable 35. Each 'independent' state-variable
may be viewed in turn as a dependent variable each with its
own set of state-variables, e.g. 36, 37, 38. Hence each
'branch point', e.g. 40 is the starting point for another
set of state-variables. This process may be geometrically
represented as the 'causation tree' 30 (see Figure 6). It
is noted that system complexity is qualitatively conveyed
by the number of branches at each level. Further it is
noted that interactions between variables is systematically

represented in the 'causation tree' by variables appearing more than once (hence state-variables may not be independent).

This structuring of information using a 'causation tree' provides a systematic means for identifying the state-variables employed in the mathematical model.

Well understood systems may be described in terms of the known variables. Poorly understood systems, or partly defined systems, may be defined in terms of new variables that represent groupings of variables. Established statistical methods are available for establishing the most appropriate variable groupings eg. factorial analysis.

The variables chosen for representation in the model described here may depend on the time scale over which the process evolves. For example, a 'glucose tolerance test' may evolve over a period of hours, while an investigation of diabetes may evolve over a period of years or decades. Different state-variables may be chosen for the analysis of the same system, depending on the time scale involved, thereby providing further means for systematically structuring system/medical information.

The previous paragraphs indicate that the state-variables chosen for an analysis are somewhat arbitrary, in that the state-variables employed must only lie further along the 'causation tree'. The actual variables chosen for measurement will therefore be dependent on many factors such as the state of knowledge, convenience of data collection, established medical practice, costs and other practical constraints associated with gathering data.

Example VI: APPLICABILITY TO 'NORMAL' STATES

The present invention may also be applied to monitor the evolution of a biological system towards a normal state. For example, the fitness level of an athlete training for a particular short term or long term goal

could be improved utilising the present invention.   In that
embodiment, the limit-state surface would define a
predetermined fitness level within a multi-dimensional
space.   The variables of the multi-dimensional space could

5   include resting heart rate, `stressed' heart rate, resting
breathing rate, `stressed' breathing rate, isotonic and
isometric muscle strength, haemoglobin concentration in the
blood.   The athlete's progress could then be monitored
utilising a trajectory within the appropriate multi-

10   dimensional space.   The analysis and displaying of the
trajectory and the limit-state surface could substantially
be the same as described in the previous examples.   In the
particular example of the athlete preparing for a short or
long term goal, previous trajectories of "successful"

15   athletes during their preparation/training could be used to
guide/evaluate the development of the athlete currently
monitored.

- 24 -

The claims defining the invention are as follows

  1.   A method of analysing an evolution of a biological system comprising the steps of:

  -       determining a series of variables upon which a state of the biological system depend;

  -       mapping the variables to an n-dimensional space; and

wherein the evolution of the biological system is monitored utilising a trajectory formed from sets of the variables which define the states of the biological system at different times, thereby using time as a parameter in the n-dimensional space in a manner such that every point on the trajectory corresponds to at least one value of time.

  2.   A method as claimed in claim 1 further comprising the step of evaluating the evolution of the biological system utilising sets of predetermined values of the variables to formulate an n-dimensional surface representing a predetermined state of the biological system within the n-dimensional space.

  3.   A method as claimed in claim 2 wherein the step of evaluating the evolution of the biological system comprises predicting a progression of the trajectory.

  4.   A method as claimed in anyone of the preceding claims, wherein n is an integer greater than 2.

  5.   A method as claimed in claim 3, wherein the prediction of the progression of the trajectory is based on other trajectories determined in the n-dimensional space.

  6.   A method as claimed in claims 3 or 5, wherein the prediction of the progression of the trajectory is based on other trajectories determined in the n-dimensional space.

  7.   A method of representing a predetermined state of a biological system comprising the steps of:

  -       determining a series of variables upon which the predetermined state of the biological system depends;

  -       mapping the variables to an n-dimensional space;

- 25 -

and

- utilising sets of predetermined values of the variables to formulate an n-dimensional surface describing the predetermined state within the n-dimensional space.

8. A computer arranged to analyse an evolution of a biological system based on series of variables upon which a state of the biological system depends, the computer being arranged to:

- map the variables to an n-dimensional space; and
- monitor the evolution of the biological system based on a trajectory formed from sets of the variables which define the states of the biological system at different times.

9. A computer as claimed in claim 8, the computer further being arranged to evaluate the evolution of the biological system utilising sets of predetermined values of the variables to formulate an n-dimensional surface representing a predetermined state of the biological system within the n-dimensional space.

10. A computer as claimed in claim 9, wherein the evaluating comprises predicting a progression of the trajectory.

11. A computer as claimed in anyone of claims 8 to 10, wherein n is an integer greater than 2.

12. A computer as claimed in claim 10, wherein the computer is arranged to base the prediction of the progression of the trajectory on the previous development of the trajectory within the n-dimensional space.

13. A computer as claimed in claims 10 or 12, wherein the computer is arranged to predict the progression of the trajectory on the basis of other trajectories determined in the n-dimensional space.

14. A computer arranged to represent a predetermined state of a biological system based on a series of variables upon which the predetermined state of the biological system

depends, the computer being arranged to:

- map the variables to an n-dimensional space; and

- formulate an n-dimensional surface describing the predetermined state within the n-dimensional space, based on sets of predetermined values of the variables.

15. A computer readable storage medium comprising instructions to control a computer to analyse an evolution of a biological system based on series of variables upon which a state of the biological system depends, the instructions comprising instruction to control the computer to:

- map the variables to an n-dimensional space; and

- monitor the evolution of the biological system based on a trajectory formed from sets of the variables which define the states of the biological system at different times.

16. A computer readable storage medium as claimed in claim 15, wherein the instructions further comprise instructions to control the computer to evaluate the evolution of the biological system utilising sets of predetermined values of the variables to formulate an n-dimensional surface representing a predetermined state of the biological system within the n-dimensional space.

17. A computer readable storage medium as claimed in claim 16, wherein the evaluating comprises predicting a progression of the trajectory.

18. A computer readable storage medium as claimed in anyone of claims 15 or 17, wherein n is an integer greater than 2.

19. A computer readable storage medium as claimed in claim 17, wherein the instructions further comprise instructions to control the computer to base the prediction of the progression of the trajectory on the previous development of the trajectory within the n-dimensional space.

20. A computer readable storage medium as claimed in claims 17 or 19, wherein the instructions further comprise instructions to control the computer to predict the progression of the trajectory on the basis of other
5 trajectories determined in the n-dimensional space.

21. A computer readable storage medium comprising instructions to control a computer to represent a predetermined state of a biological system based on a series of variables upon which the predetermined state of
10 the biological system depends, the instructions comprising instructions to control the computer to:

  - map the variables to an n-dimensional space; and

  - formulate an n-dimensional surface describing the predetermined state within the n-dimensional space, based
15 on sets of predetermined values of the variables.
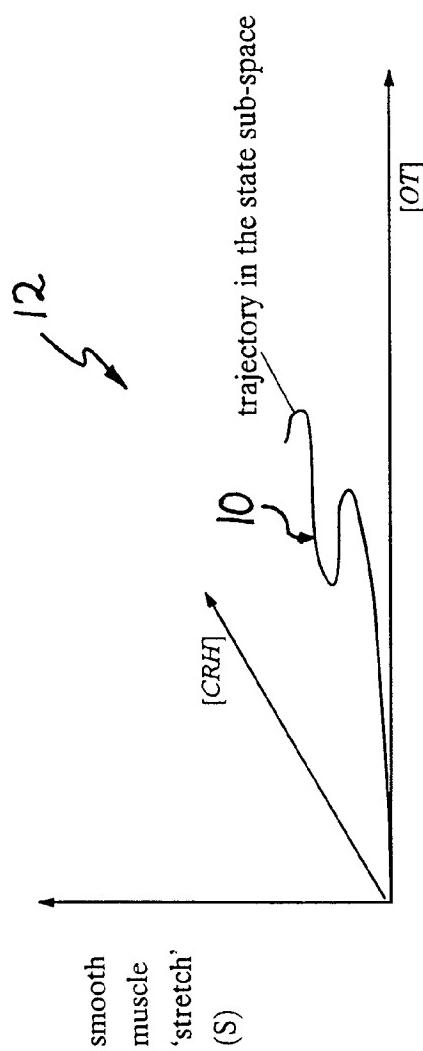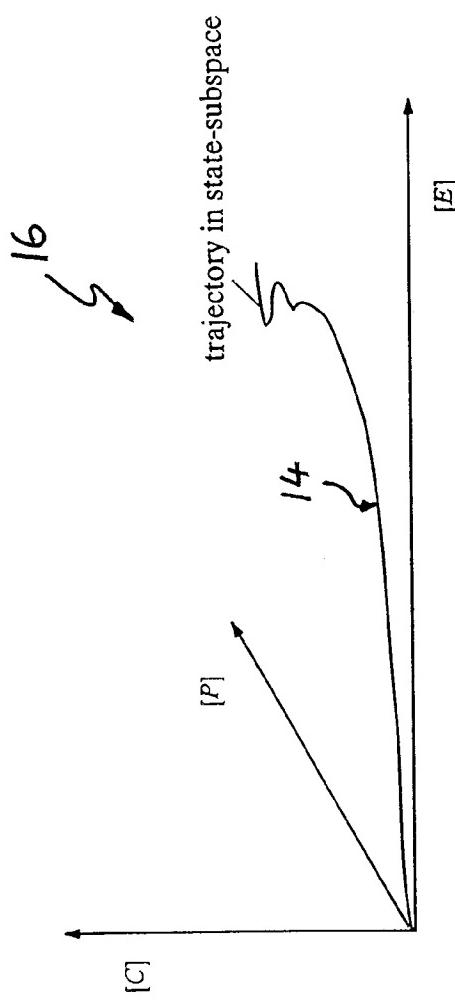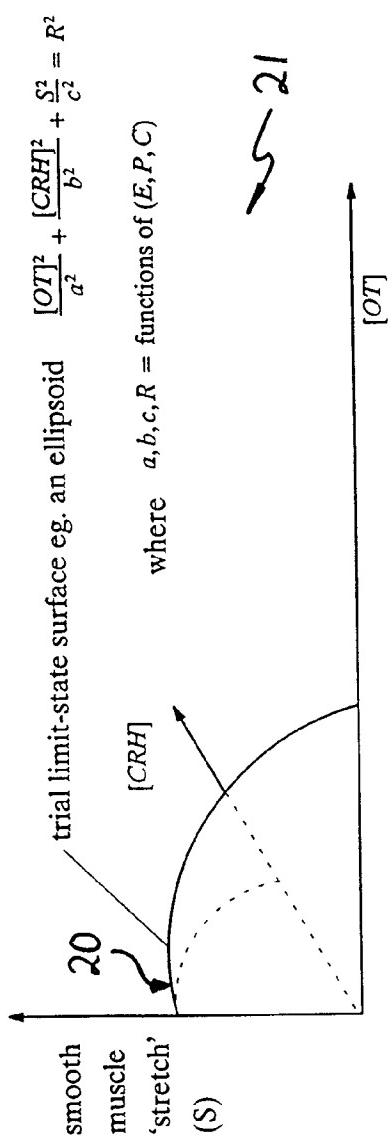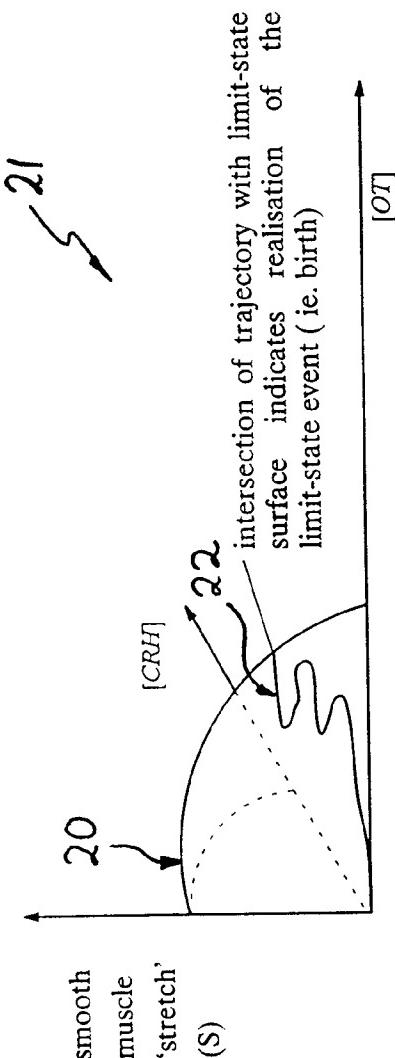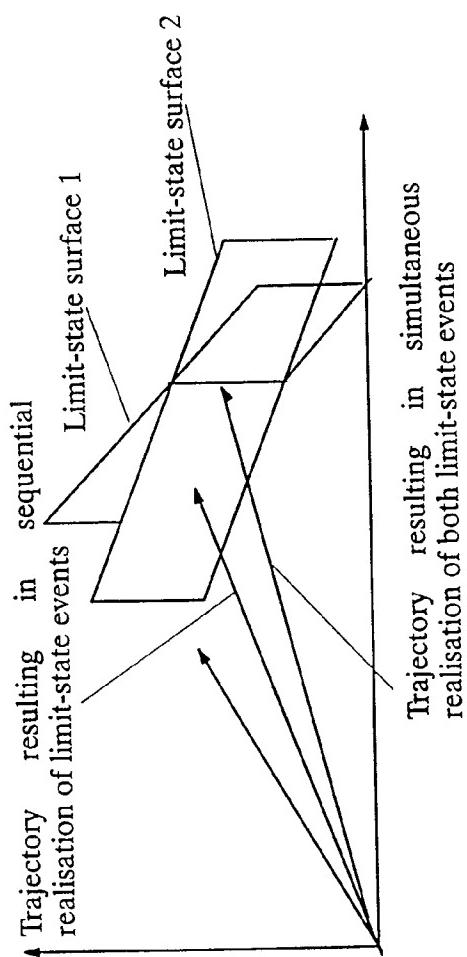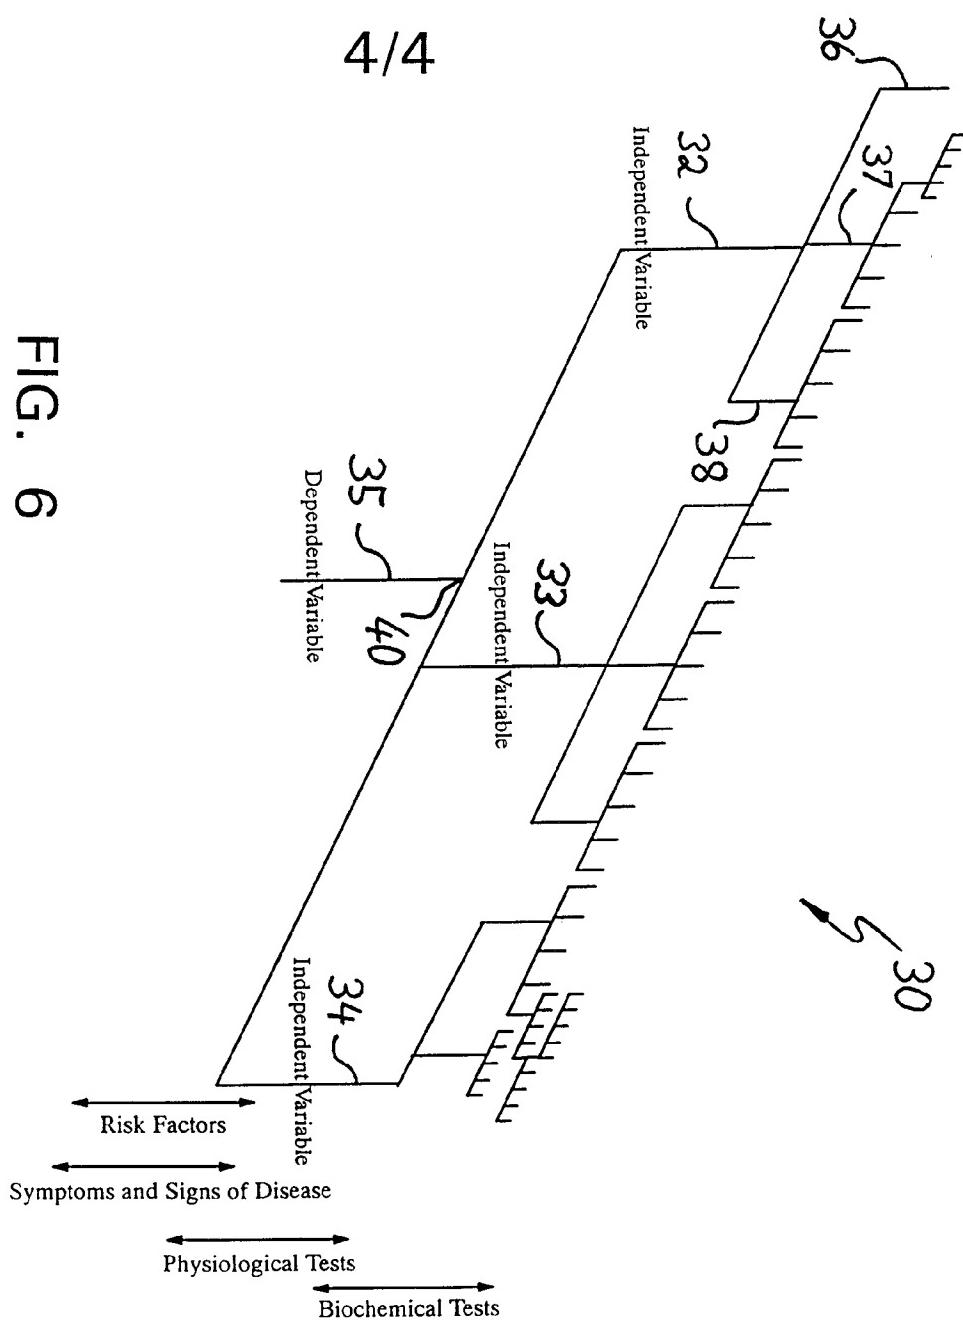
FIG. 1

smooth
muscle
'stretch'
(S)

[CRH]

12

10

trajectory in the state sub-space

[OT]

FIG. 2

16

14

trajectory in state-subspace

[P]

[C]

[E]

FIG. 3

smooth
muscle
'stretch'
(S)

20

trial limit-state surface eg. an ellipsoid

[CRH]

$$\frac{[OT]^2}{a^2} + \frac{[CRH]^2}{b^2} + \frac{S^2}{c^2} = R^2$$

where a, b, c, R = functions of (E, P, C)

21

[OT]

FIG. 4

smooth
muscle
'stretch'
(S)

20

21

[CRH]

22

intersection of trajectory with limit-state
surface indicates realisation of the
limit-state event (ie. birth)

[OT]

FIG. 5

FIG. 6

A.	CLASSIFICATION OF SUBJECT MATTER

Int Cl^6: G06F 19/00, 159:00

According to International Patent Classification (IPC) or to both national classification and IPC

B.	FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC G06F 159:00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
MEDLINE on Internet
"trajectory" or "phase space" or "state space"

C.	DOCUMENTS CONSIDERED TO BE RELEVANT	
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Yagyu et al., Global Dimensional Complexity of Multichannel EEG in Mild Alzheimer's Disease and Age-Matched Cohorts, Dementia and Geriatric Cognitive Disorders, Vol 8, No. 6, 1997, pages 343-347. See abstract	1, 7, 8, 14, 15, & 21
X	Bastiaanssen et al., State-space Analysis of a Myocybernetic Model of the Lower Urinary Tract, Journal of Theoretical Biology, Vol 180(3), 7 June 1996, pages 215-227. See whole document.	1 to 21
X	Witt, Multichannel Evoked Potentials as Voltage Space Trajectories, Mathematical Biosciences Vol 124(2) December 1994, pages 207-224. See whole document.	1 to 4, 7 to 12, 14 to 19 & 21

[X] Further documents are listed in the continuation of Box C

[ ] See patent family annex

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be of particular relevance		
"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
31 August 1999	07 SEP 1999

Name and mailing address of the ISA/AU	Authorized officer
AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (02) 6285 3929	Michael Hardy Telephone No.: (02) 6283 2547

C (Continuation).	DOCUMENTS CONSIDERED TO BE RELEVANT	
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Kaplan, Geometrical Techniques for Analyzing ECG Dynamics, Journal of Electrocardiology Vol 24 (supplement) 1992, pages 77-82. See whole document.	1 to 4, 7 to 12, 14 to 19 &21
X	Eisenhammer et al., Modeling Experimental Time Series with Ordinary Differential Equations, Biological Cybernetics, Vol 65 No. 2, 1991, pages 107-112. See whole document.	1 to 4, 7 to 12, 14 to 19 & 21
X	Park et al., Mathematical Modeling of Differentiation in Dictyostelium Discoideum, Molecular & Cellular Biochemistry, Vol 8 No 2, 31 August 1975. See whole document.	1 to 21